

F L E X I B L E C O N N E C T I O N S



FLEXITUB, S.L.®



INDEX:



- Faucets** 4
- Grifería
 - Grifería Mini



- Shower hoses** 14
- Classic
 - Luxe
 - Luxe Extensible



- Sanitary installations** 6
- CGS



- Gas connections** 16
- Flexi-gas
 - Flexi-gas Plus
 - Flexi-gas Extensible



- Great diameter sanitary installations** 8
- Plus



- Oil connections** 18
- Flexi-oil



- Water heaters connections** 10
- Conta



- Components** 20
- Brass fittings



- Water pumps connections** 12
- Gal



FLEXITUB, S.L. is a young, dynamic, Barcelona based company founded in 1987 and dedicated exclusively to the manufacture of flexible connectors for water and gas. The company is a pioneer within this sector in Spain.

The national and international development of **FLEXITUB S.L.** is based on constant growth, involving the continual expansion of our facilities to incorporate the most sophisticated and up to date quality systems. Only in this way can we be completely sure of the safety of the products in the manufacturing process and thus meet all the regulations, certification and quality control procedures relevant to our activity. The award of these certificates is recognition of the constant effort of the whole team at **FLEXITUB S.L.**



APPROVALS



AENOR (Spain)
001/00510



AENOR (Spain)
001/00510



KIWA (Netherlands)
K-21862/02



CSTBat (France)
29-957



DVGW (Germany)
DW-0304BT0006



PCT (Russia)
HO03.C02249



PCT (Russia)
MT01.B02364



INSTAL (Poland)
AT/2000-02-929



MBVTI (Hungary)
MT 05 0263 01



MBVTI (Hungary)
MT 05 1466



MBVTI (Hungary)
MT 05 1465



AR (Rumania)
016-05/2489-2004



AR (Rumania)
016-05/2490-2004

10
years
warranty

Food use

90°C

10
Bars

GRIFERIA

Technical characteristics

- Inner Ø 8 mm.
- Outer Ø 12 mm.
- EPDM rubber / PE-Xc inner hose.
- Stainless steel braid AISI 304, 7H.
- Stainless steel metal tip AISI 304.
- Nickel plated brass end fittings.
- EPDM washer incorporated.

End fittings

- M8x100 - H 3/8"
- M9x100 - H 3/8"
- M10x100 - H 3/8"
- M12x100 - H 3/8"
- Bicono 10 - 12 - 14

Length (cms)

- 30 - 37
- Please ask for other models

Applications

Faucets.



GRIFERIA MINI

Technical characteristics

- Inner Ø 6.3 mm.
- Outer Ø 10 mm.
- EPDM rubber / PE-Xc inner hose.
- Stainless steel braid AISI 304.
- Stainless steel metal tip AISI 304.
- Nickel plated brass end fittings.
- EPDM washer incorporated.

End fittings

- M10x100 - H 3/8"
- M10x100 - H 1/2"
- M8x100 - H 3/8"

Length (cms)

- 30 - 37
- Please ask for other models




Applications

Faucets.

Cut hose

- 1 Nickel plated brass end fittings.
- 2 Brass.
- 3 EPDM rubber inner hose.
- 3a PE-Xc inner hose.
- 4 Stainless steel braid AISI 304.
- 5 Stainless steel ferrule AISI 304.
- 6 EPDM rubber washer.

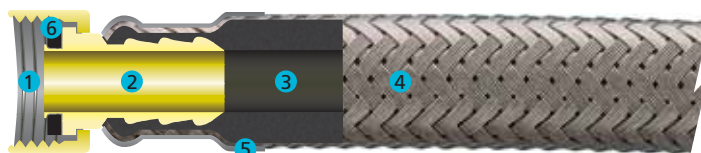



SANITARY INSTALLATIONS

connections

STAINLESS STEEL

10
years
warranty

Food use

90°C

10
Bars

CGS

Technical characteristics

- Inner Ø 8 mm.
- Outer Ø 12 mm.
- EPDM rubber inner hose.
- Stainless steel braid AISI 304. 7H.
- Stainless steel metal tip AISI 304.
- Nickel plated brass end fittings.
- EPDM washer incorporated.

Applications

Sanitary installations, faucets, waters heaters, wash-basins, bidets, catering machine.

End fittings

Connection

H - H 3/8"
M - H 3/8"
H - H 1/2"
M - H 1/2"
H 1/2" - H 3/8"
M 1/2" - H 3/8"
M 3/8" - H 1/2"
H 1/2" - H 3/4"
H - H 3/4"
M - H 3/4"

Elbow fittings

M 1/2" - Codo 1/2"
H 1/2" - Codo 1/2"
M 3/8" - Codo 1/2"
H 3/8" - Codo 1/2"
M 1/2" - Codo 3/8"
H 1/2" - Codo 3/8"
M 3/8" - Codo 3/8"
H 3/8" - Codo 3/8"

Compression fittings

M 1/2" - B10 H 3/8" - B10
M 1/2" - B12 H 3/8" - B12
M 1/2" - B14 H 3/8" - B14
H 1/2" - B10 B10 - B10
H 1/2" - B12 B10 - B12
H 1/2" - B14 B10 - B14
M 3/8" - B10 B12 - B12
M 3/8" - B12 B12 - B14
M 3/8" - B14 B14 - B14


Length (cms)

15 • 20 • 25 • 30
35 • 40 • 45 • 50
60 • 70 • 80 • 90
100
Please ask for
other models



Cut hose

- 1 Nickel plated brass end fittings.
- 2 Brass.
- 3 EPDM rubber inner hose.
- 4 Stainless steel braid AISI 304.
- 5 Stainless steel ferrule AISI 304.
- 6 EPDM rubber washer.

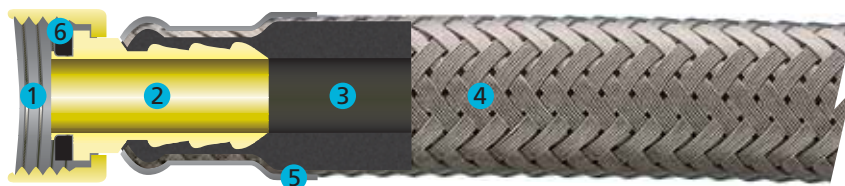



GREAT DIAMETER SANITARY INSTALLATIONS

connections

STAINLESS STEEL

10
years
warranty

Food use

100°C

16
Bars

PLUS

Technical characteristics

- Inner Ø 13 mm.
- Outer Ø 20 mm.
- EPDM rubber inner hose.
- Stainless steel braid AISI 304.
- Stainless steel metal tip AISI 304.
- Nickel plated brass end fittings.
- EPDM washer incorporated.

Applications

Water heaters, water tanks, fan-coils, air conditioning, solar panels.

End fittings


- H - H 1/2"
- M - H 1/2"
- H - H 3/4"
- M - H 3/4"
- H 1/2" - H 3/4"
- M 1/2" - H 3/4"
- M 3/4" - H 1/2"
- Codo H 1/2" - M 1/2"
- Codo H 3/4" - M 3/4"
- Codo 1/2" - M 1/2"
- Codo 1/2" - M 3/4"
- Codo 1/2" - H 1/2"
- Codo 1/2" - H 3/4"
- Codo 3/4" - H 1/2"
- Codo 3/4" - H 3/4"
- Codo 3/4" - M 3/4"
- Codo 3/4" - M 1/2"

Length (cms)

15 • 20 • 25 • 30 • 35 • 40 • 50 • 60 • 70 • 100
Please ask for other models

Cut hose

- 1 Nickel plated brass end fittings.
- 2 Brass.
- 3 Inner EPDM rubber pipe.
- 4 Stainless steel braid AISI 304.
- 5 Stainless steel ferrule AISI 304.
- 6 EPDM rubber washer.

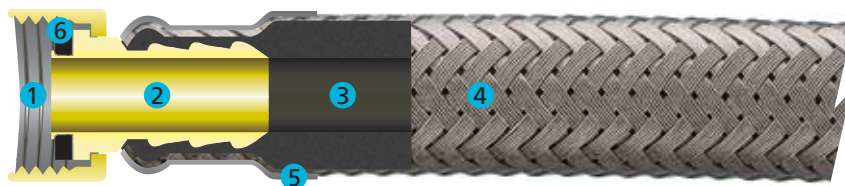



STAINLESS STEEL



CONTA 3/4"

Technical characteristics

- Inner Ø 19 mm.
- Outer Ø 28 mm.
- EPDM rubber inner hose.
- Stainless steel braid AISI 304.
- Stainless steel metal tip AISI 304.
- Brass end fittings.

End fittings

H - H 3/4"
M - H 3/4"
M 1" - H 3/4"

Length (cms)

30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

CONTA 1"

Technical characteristics

- Inner Ø 25 mm.
- Outer Ø 35 mm.
- EPDM rubber inner hose.
- Stainless steel braid AISI 304.
- Stainless steel metal tip AISI 304.
- Brass end fittings.

End fittings

H - H 1"
M - H 1"

Length (cms)

30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

CONTA 1 1/4"

Technical characteristics

- Inner Ø 30 mm.
- Outer Ø 40 mm.
- EPDM rubber inner hose.
- Stainless steel braid AISI 304.
- Stainless steel metal tip AISI 304.
- Brass end fittings.

End fittings

H - H 1 1/4"
M - H 1 1/4"
M 1 1/4" - H 1"

Length (cms)

30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

CONTA 1 1/2"

Technical characteristics

- Inner Ø 40 mm.
- Outer Ø 50 mm.
- EPDM rubber inner hose.
- Stainless steel braid AISI 304.
- Stainless steel metal tip AISI 304.
- Brass end fittings.

End fittings

H - H 1 1/2"
M - H 1 1/2"

Length (cms)

30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

CONTA 2"

Technical characteristics

- Inner Ø 50 mm.
- Outer Ø 60 mm.
- EPDM rubber inner hose.
- Stainless steel braid AISI 304.
- Stainless steel metal tip AISI 304.
- Brass end fittings.

End fittings

H - H 2"
M - H 2"

Length (cms)


30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

Applications

Water heaters, pressure units, air conditioning.

Cut hose

- 1 Brass end fittings.
- 2 Brass.
- 3 EPDM rubber inner hose.
- 4 Stainless steel braid AISI 304.

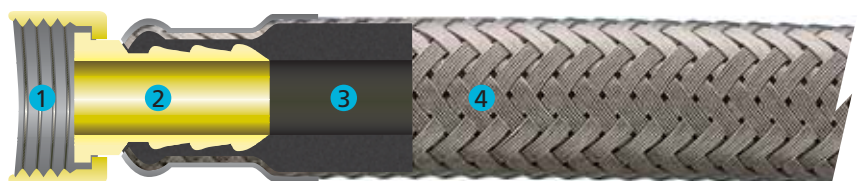



ASSEMBLY

Water heaters installation.



GALVANIZED STEEL



GAL 1/2"

Technical characteristics

- Inner Ø 13 mm.
- Outer Ø 20 mm.
- EPDM rubber inner hose.
- Galvanized steel braid.
- Galvanized steel metal tip.
- Brass end fittings.

End fittings

H - H 1/2"
M - H 1/2"

Length (cms)

30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

GAL 3/4"

Technical characteristics

- Inner Ø 19 mm.
- Outer Ø 28 mm.
- EPDM rubber inner hose.
- Galvanized steel braid.
- Galvanized steel metal tip.
- Brass end fittings.

End fittings

H - H 3/4"
M - H 3/4"
M 1" - H 3/4"

Length (cms)

30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

GAL 1"

Technical characteristics

- Inner Ø 25 mm.
- Outer Ø 35 mm.
- EPDM rubber inner hose.
- Galvanized steel braid.
- Galvanized steel metal tip.
- Brass end fittings.

End fittings

H - H 1"
M - H 1"

Length (cms)

30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

GAL 1 1/4"

Technical characteristics

- Inner Ø 30 mm.
- Outer Ø 40 mm.
- EPDM rubber inner hose.
- Galvanized steel braid.
- Galvanized steel metal tip.
- Brass end fittings.

End fittings

H - H 1 1/4"
M - H 1 1/4"
M 1 1/4" - H 1"

Length (cms)

30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

GAL 1 1/2"

Technical characteristics

- Inner Ø 40 mm.
- Outer Ø 50 mm.
- EPDM rubber inner hose.
- Galvanized steel braid.
- Galvanized steel metal tip.
- Brass end fittings.

End fittings

H - H 1 1/2"
M - H 1 1/2"

Length (cms)

30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask

GAL 2"

Technical characteristics

- Inner Ø 50 mm.
- Outer Ø 60 mm.
- EPDM rubber inner hose.
- Galvanized steel braid.
- Galvanized steel metal tip.
- Brass end fittings.

End fittings

H - H 2"
M - H 2"

Length (cms)


30 · 40 · 50 · 60
70 · 80 · 90 · 100
Others: please ask


Applications

Water meters, pressure units.


Cut hose

- 1 Brass end fittings.
- 2 Brass.
- 3 EPDM rubber inner hose.
- 4 Galvanized steel braid.

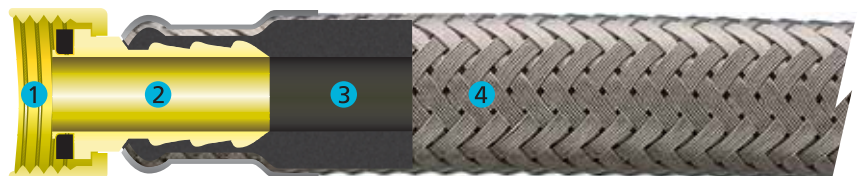

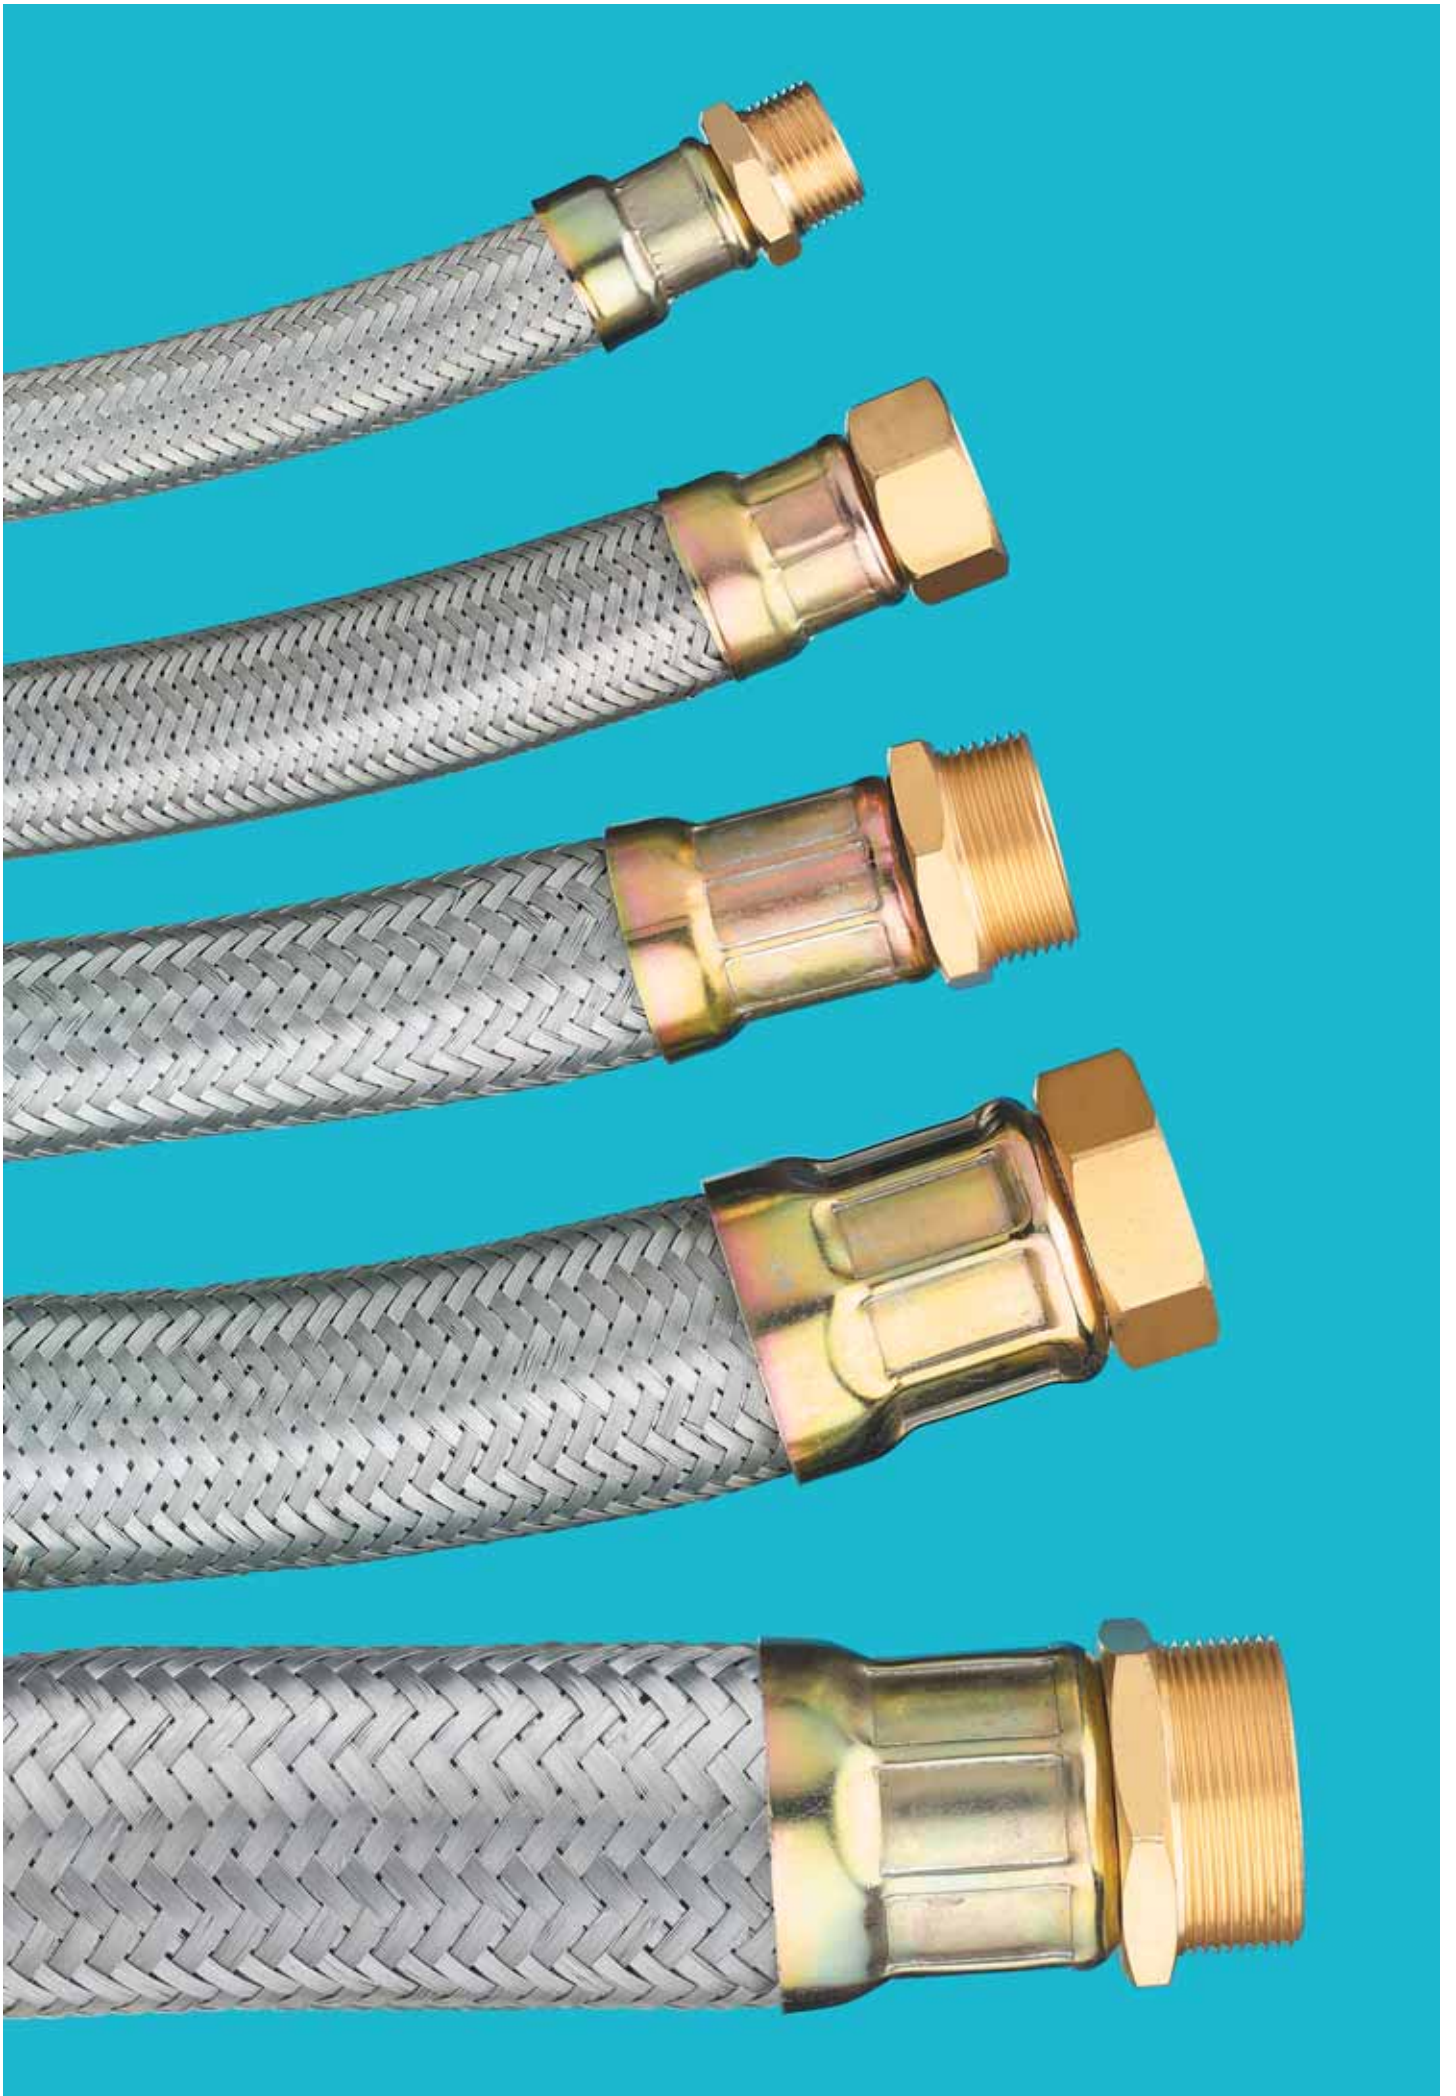

SHOWER HOSES



CLASSIC STAINLESS STEEL DOUBLE STAPLING

Technical characteristics


- Double stapling.
- Stainless steel.
- Super-strengthened.

References

H 1/2" - H 1/2"

Length (cms)

150 - 200
Please ask for other models

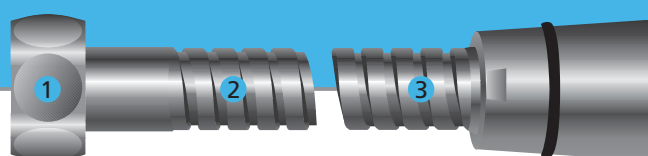

① Chrome brass ② Stainless steel ③ Double stapling

LUXE BRASS DOUBLE STAPLING

Technical characteristics


- Double stapling.
- Chrome brass
- Super-strengthened.

References

H 1/2" - H 1/2"

Length (cms)

170
Please ask for other models

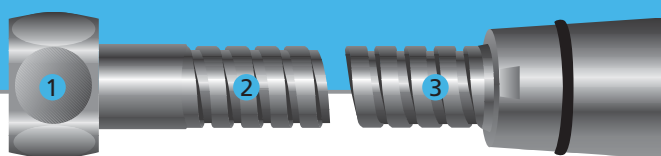

① ② Chrome brass ③ Double stapling

LUXE EXTENSIBLE STAINLESS STEEL DOUBLE STAPLING

Technical characteristics


- Double stapling.
- Stainless steel.
- Super-strengthened.
- Extendable.

References

H 1/2" - H 1/2"

Length (cms)

170
Please ask for other models

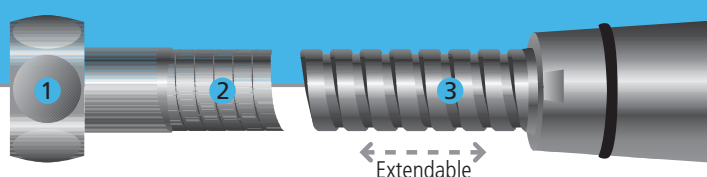

① Chrome brass ② Stainless steel ③ Double stapling



GAS HOSE

FLEXI-GAS


Technical characteristics	End fittings	Length (cms)
<ul style="list-style-type: none"> Inner Ø 8,5 mm. Outer Ø 13 mm. N.B.R. rubber inner hose. Stainless steel braid AISI 304 with yellow line. Stainless steel metal tip AISI 304. Nickel plated brass end fittings. 	<ul style="list-style-type: none"> H - H 1/2" H 1/2" - H 3/4" M - H 1/2" M 1/2" - H 3/4" H - H 3/4" M 3/4" - H 1/2" M - H 3/4" 	<ul style="list-style-type: none"> 20 · 30 · 40 · 50 · 60 · 70 · 80 90 · 100 · 120 · 150 · 180 · 200 250 · 300 · 350 · 400 Please ask for other models
	Applications Installations of natural gas or town gas.	

FLEXI-GAS PLUS

Technical characteristics	End fittings	Length (cms)
<ul style="list-style-type: none"> Inner Ø 13 mm. Outer Ø 19 mm. N.B.R. rubber inner hose. Stainless steel braid AISI 304 with yellow line. Stainless steel metal tip AISI 304. Nickel plated brass end fittings. 	<ul style="list-style-type: none"> H - H 1/2" H 1/2" - H 3/4" M - H 1/2" M 1/2" - H 3/4" H - H 3/4" M 3/4" - H 1/2" M - H 3/4" 	<ul style="list-style-type: none"> 20 · 30 · 40 · 50 · 60 · 70 · 80 90 · 100 · 120 · 150 · 180 · 200 250 · 300 · 350 · 400 Please ask for other models
	Applications Installations of natural gas or town gas.	

FLEXI-GAS EXTENSIBLE

Technical characteristics	End fittings	Min. Length (cms)	Max. Length (cms)
Made entirely from stainless steel, unique in the market, with hexagonal tightening spanner slots for increased installation safety. The circular section is completely protected by 0.5 mm thick, yellow, plastic insulation to prevent corrosion by aggressive liquids and avoid electrical dispersion. 100% extendable.	H - H 1/2"	30	to 60
	M - H 1/2"	50	to 100
		75	to 150
		100	to 200
	Description Flexible, extendable, stainless steel hose with connections for medium pressure gas conduction according to regulation 60.713/1.	125	to 200
	Applications Connection to individual, fixed or immobilised, gas appliances that use 1 st , 2 nd or 3 rd family combustible gases at pressures of up to 0.4 Bar.		

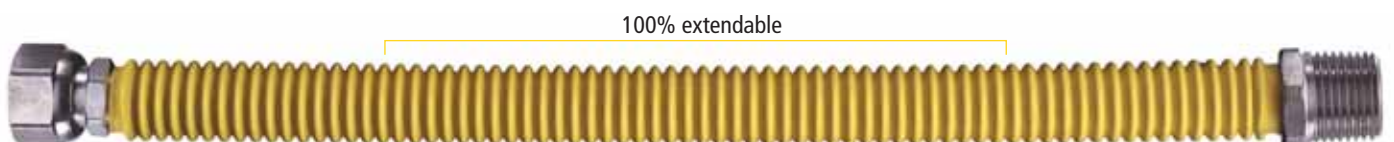



OIL HOSE

FLEXI-OIL

Technical characteristics

- Inner Ø 8 mm.
- Outer Ø 14 mm.
- Nitrile inner hose.
- Galvanized steel braid.
- Galvanized steel metal tip.
- Stainless steel end fittings.

End fittings

- | | |
|---------------------|---------|
| H - H 3/8" | M 3/8" |
| M - H 3/8" | H 3/8" |
| Elbow H1/4" - H3/8" | H 1/2" |
| Elbow M1/4" - H3/8" | H 1/4" |
| H1/2" - H 3/8" | CH 1/4" |
| H 1/4" - H 3/8" | CM 1/4" |
| Codo 3/8" - H 3/8" | CH 3/8" |

Length (cms)

30 · 40 · 50 · 60 · 70 · 80 · 90 · 100
Please ask for other models

Applications

Petrol, oil and fuel-oil pipes

Cut hose

- ① Zinc-coated steel end fittings.





COMPONENTS

Specialised machining to meet the design of any brass fittings from 1/2" to 2".





